



Deno Compressors

DENO Compressors B.V.

Van der Giessenweg 49
2921 LP Krimpen aan den IJssel
The Netherlands
info@denocomp.nl


Operation and Maintenance Manual - Electrical part

Project name: DENO 45
Project number: 786-887-400_45
Index: EIE1548
Power supply: 380-420V/3Ph/50Hz 420-460V/3Ph/60Hz
Power supply type: L1, L2, L3, PE
Control: 24VAC
Control system: DMS-687

Last change: 23.05.2025
Number of pages: 12
Notes:

Contents


[illegible]

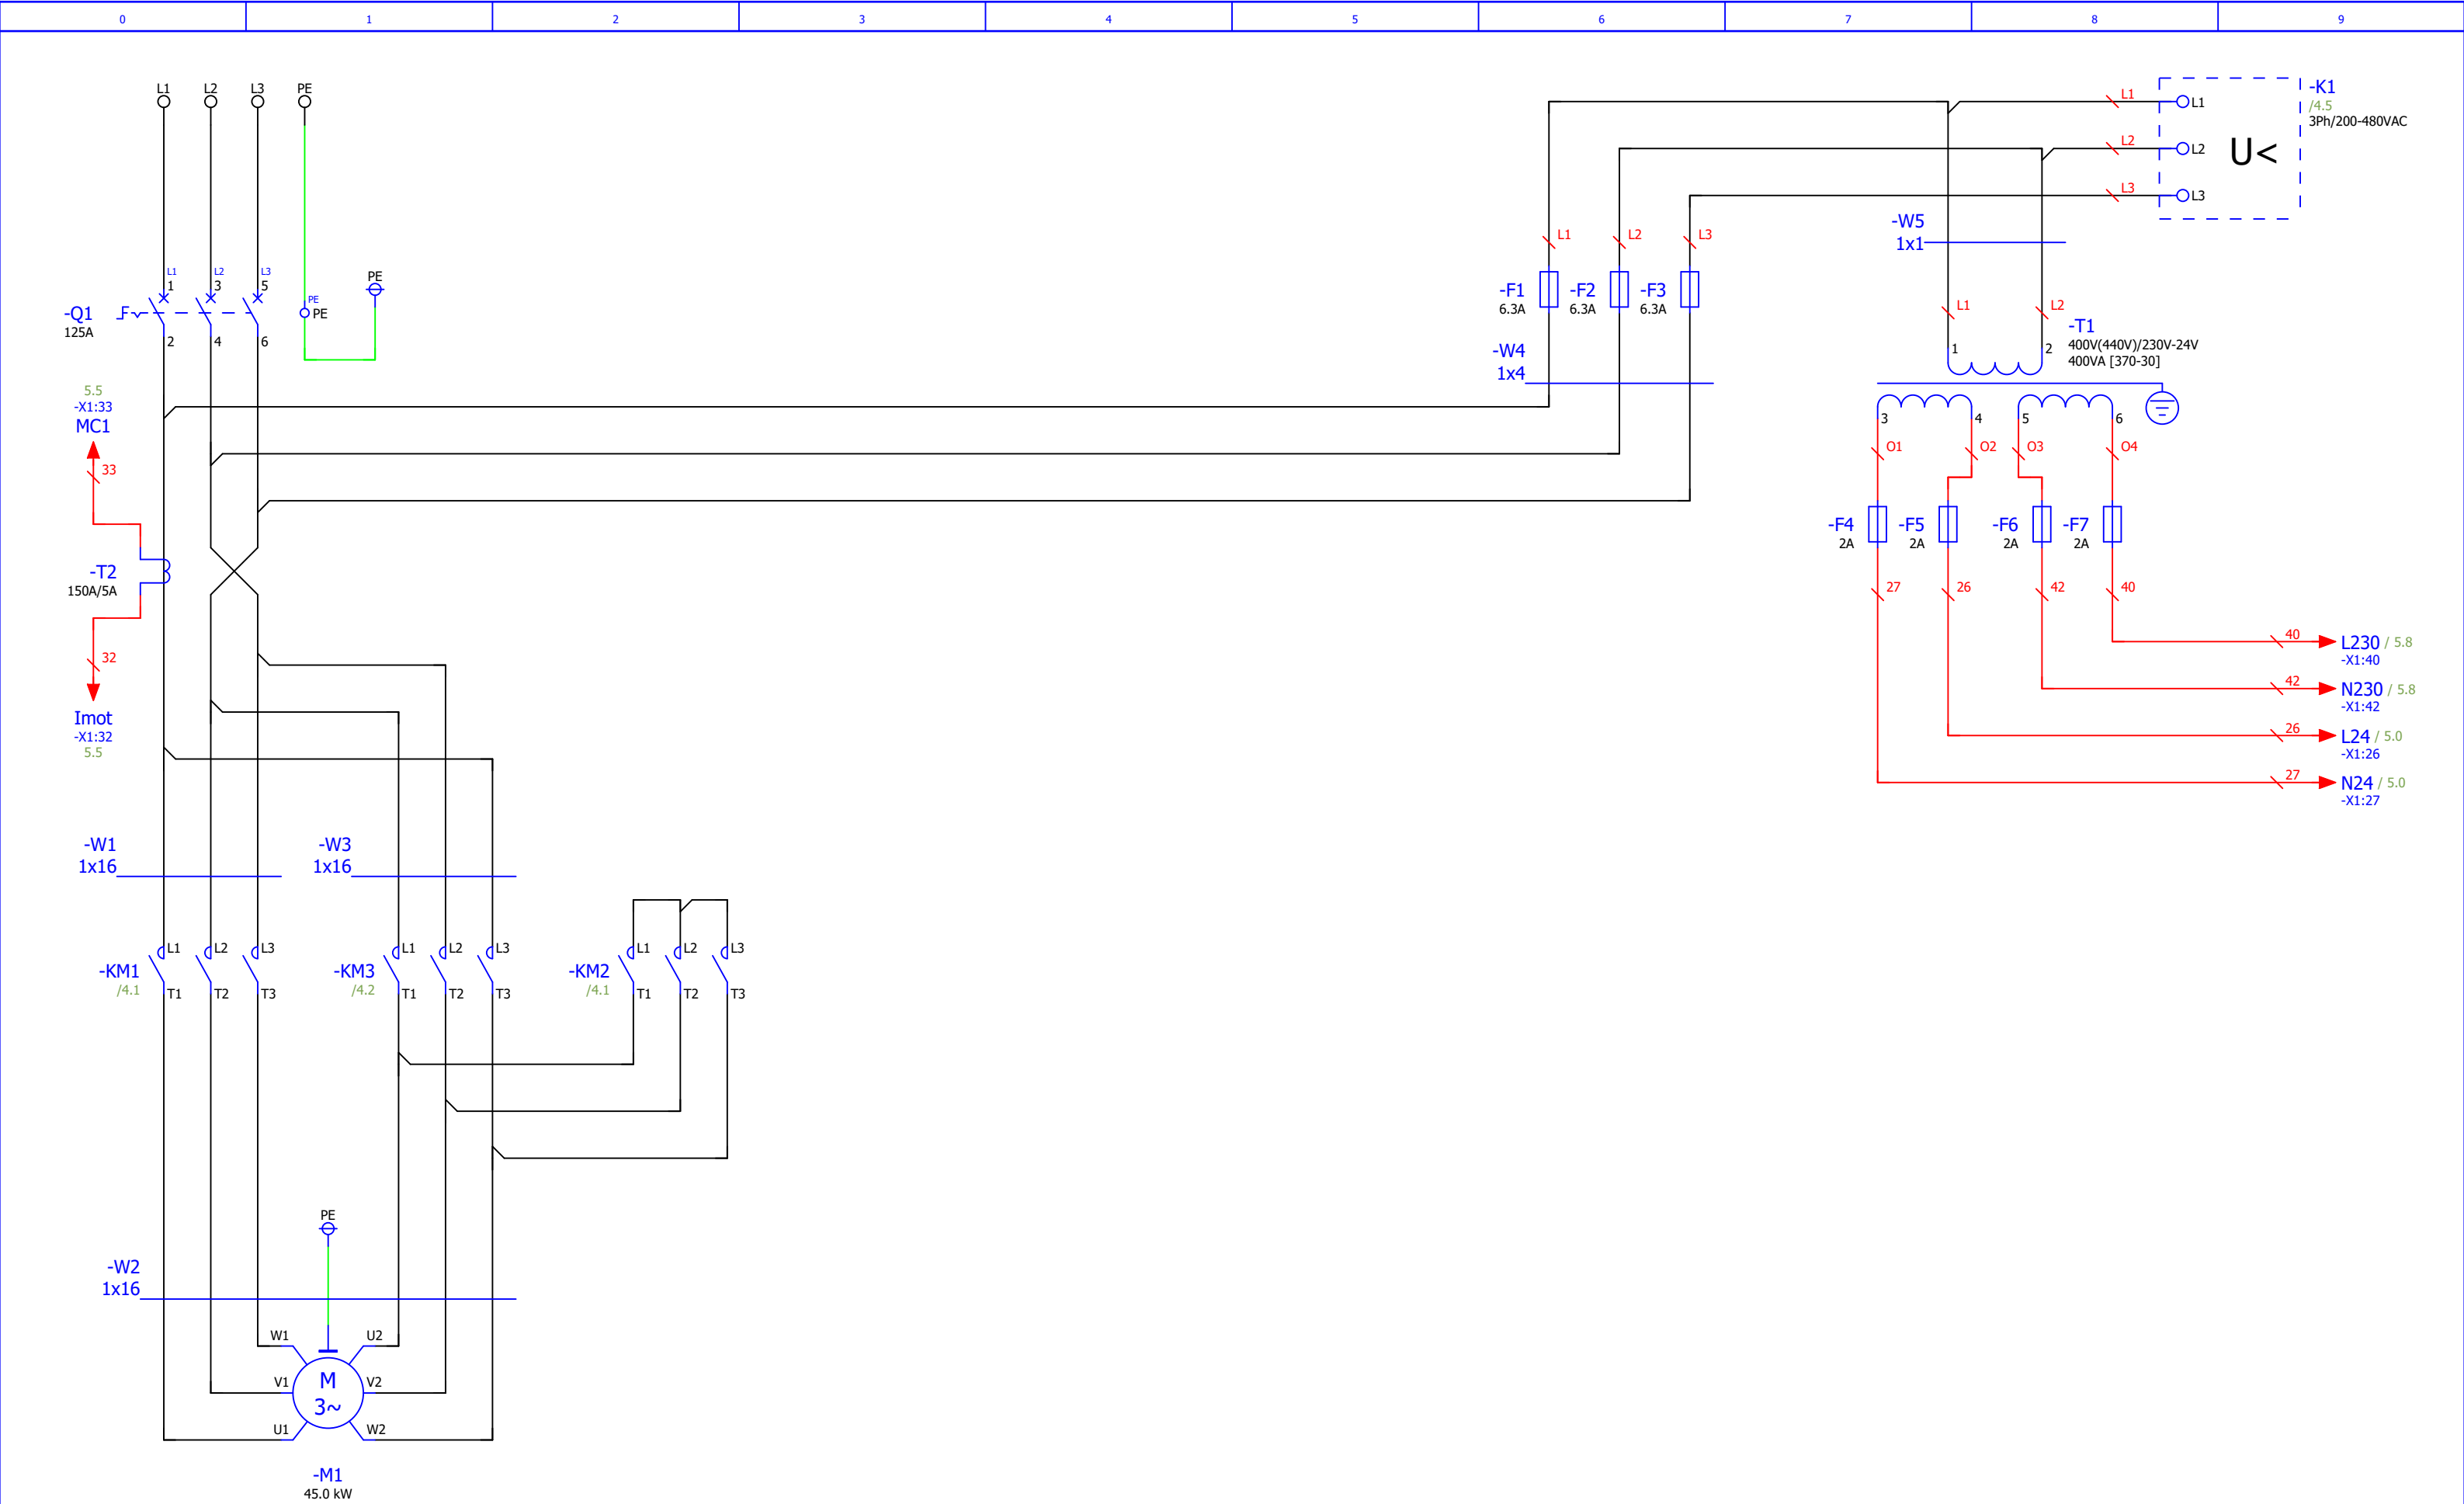



Phase	Direction of rotation			
	Left		Right	
L1	U1	W2	V1	V2
L2	W1	V2	V1	W2
L3	V1	U2	W1	U2

Attention:

- The direction of rotation is determined by looking at the motor from the drive side.
- Connection type suitable for counterclockwise direction of rotation.
- The method of connection depends on the design of the screw stage.

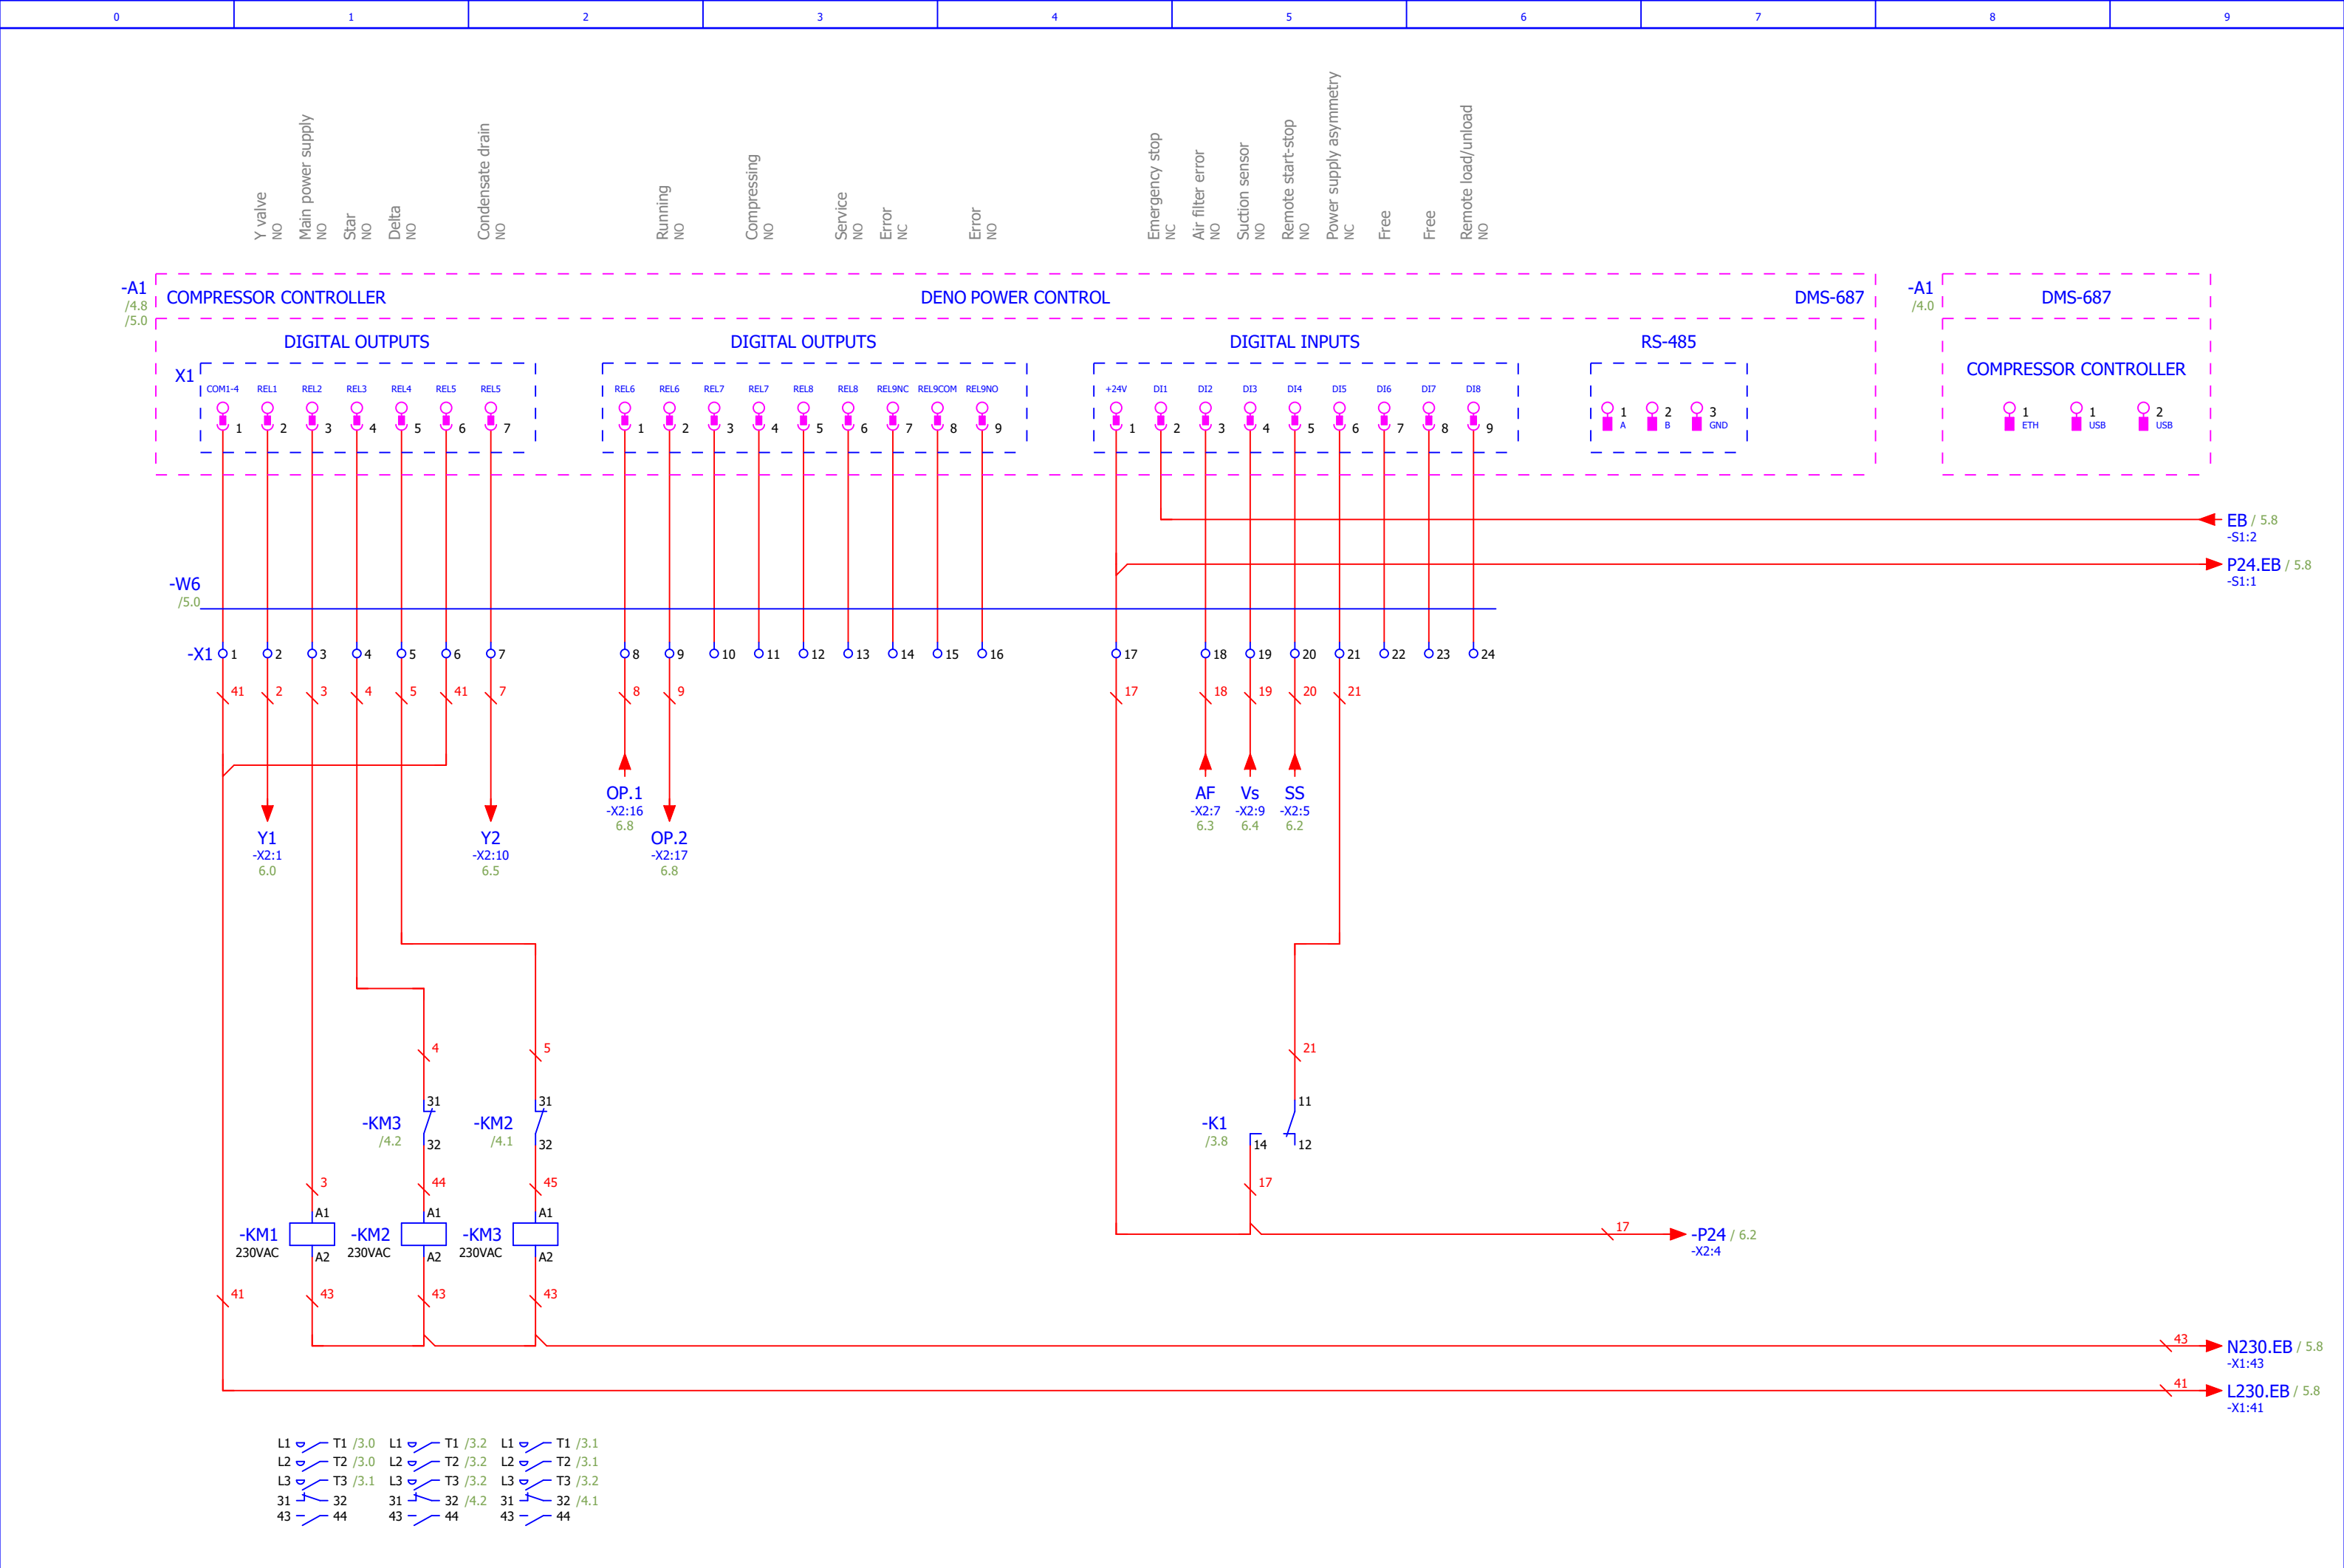

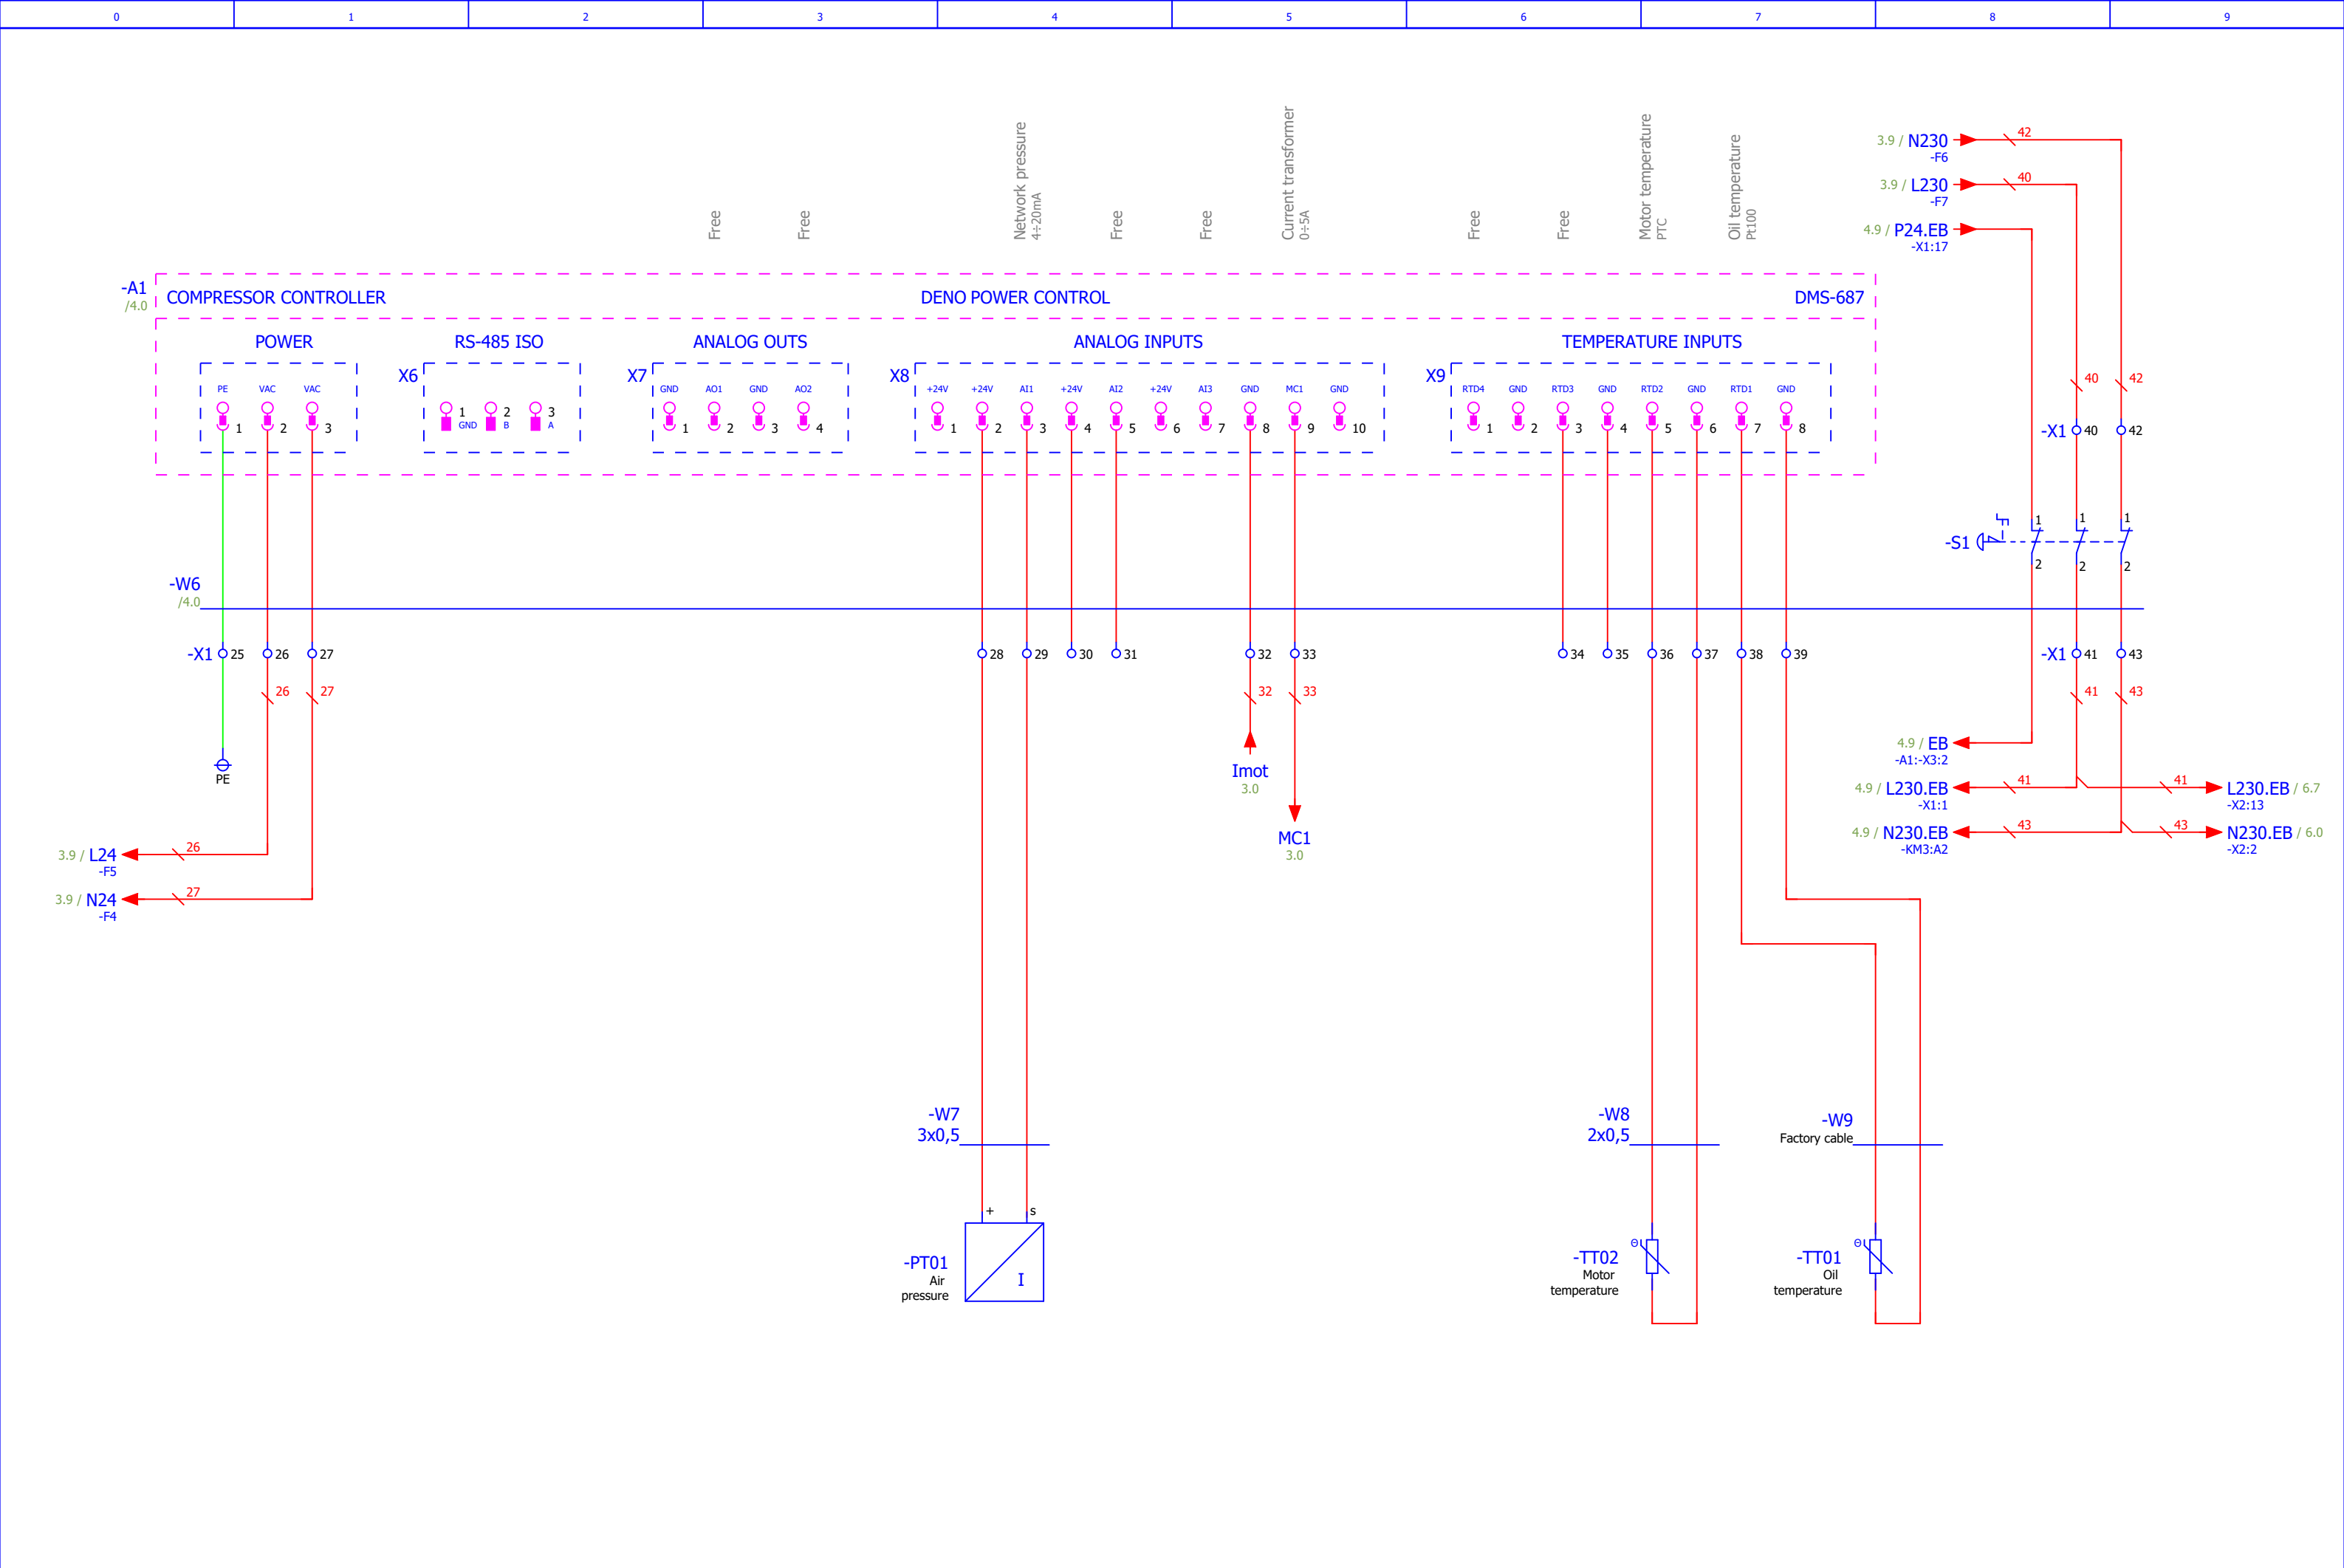

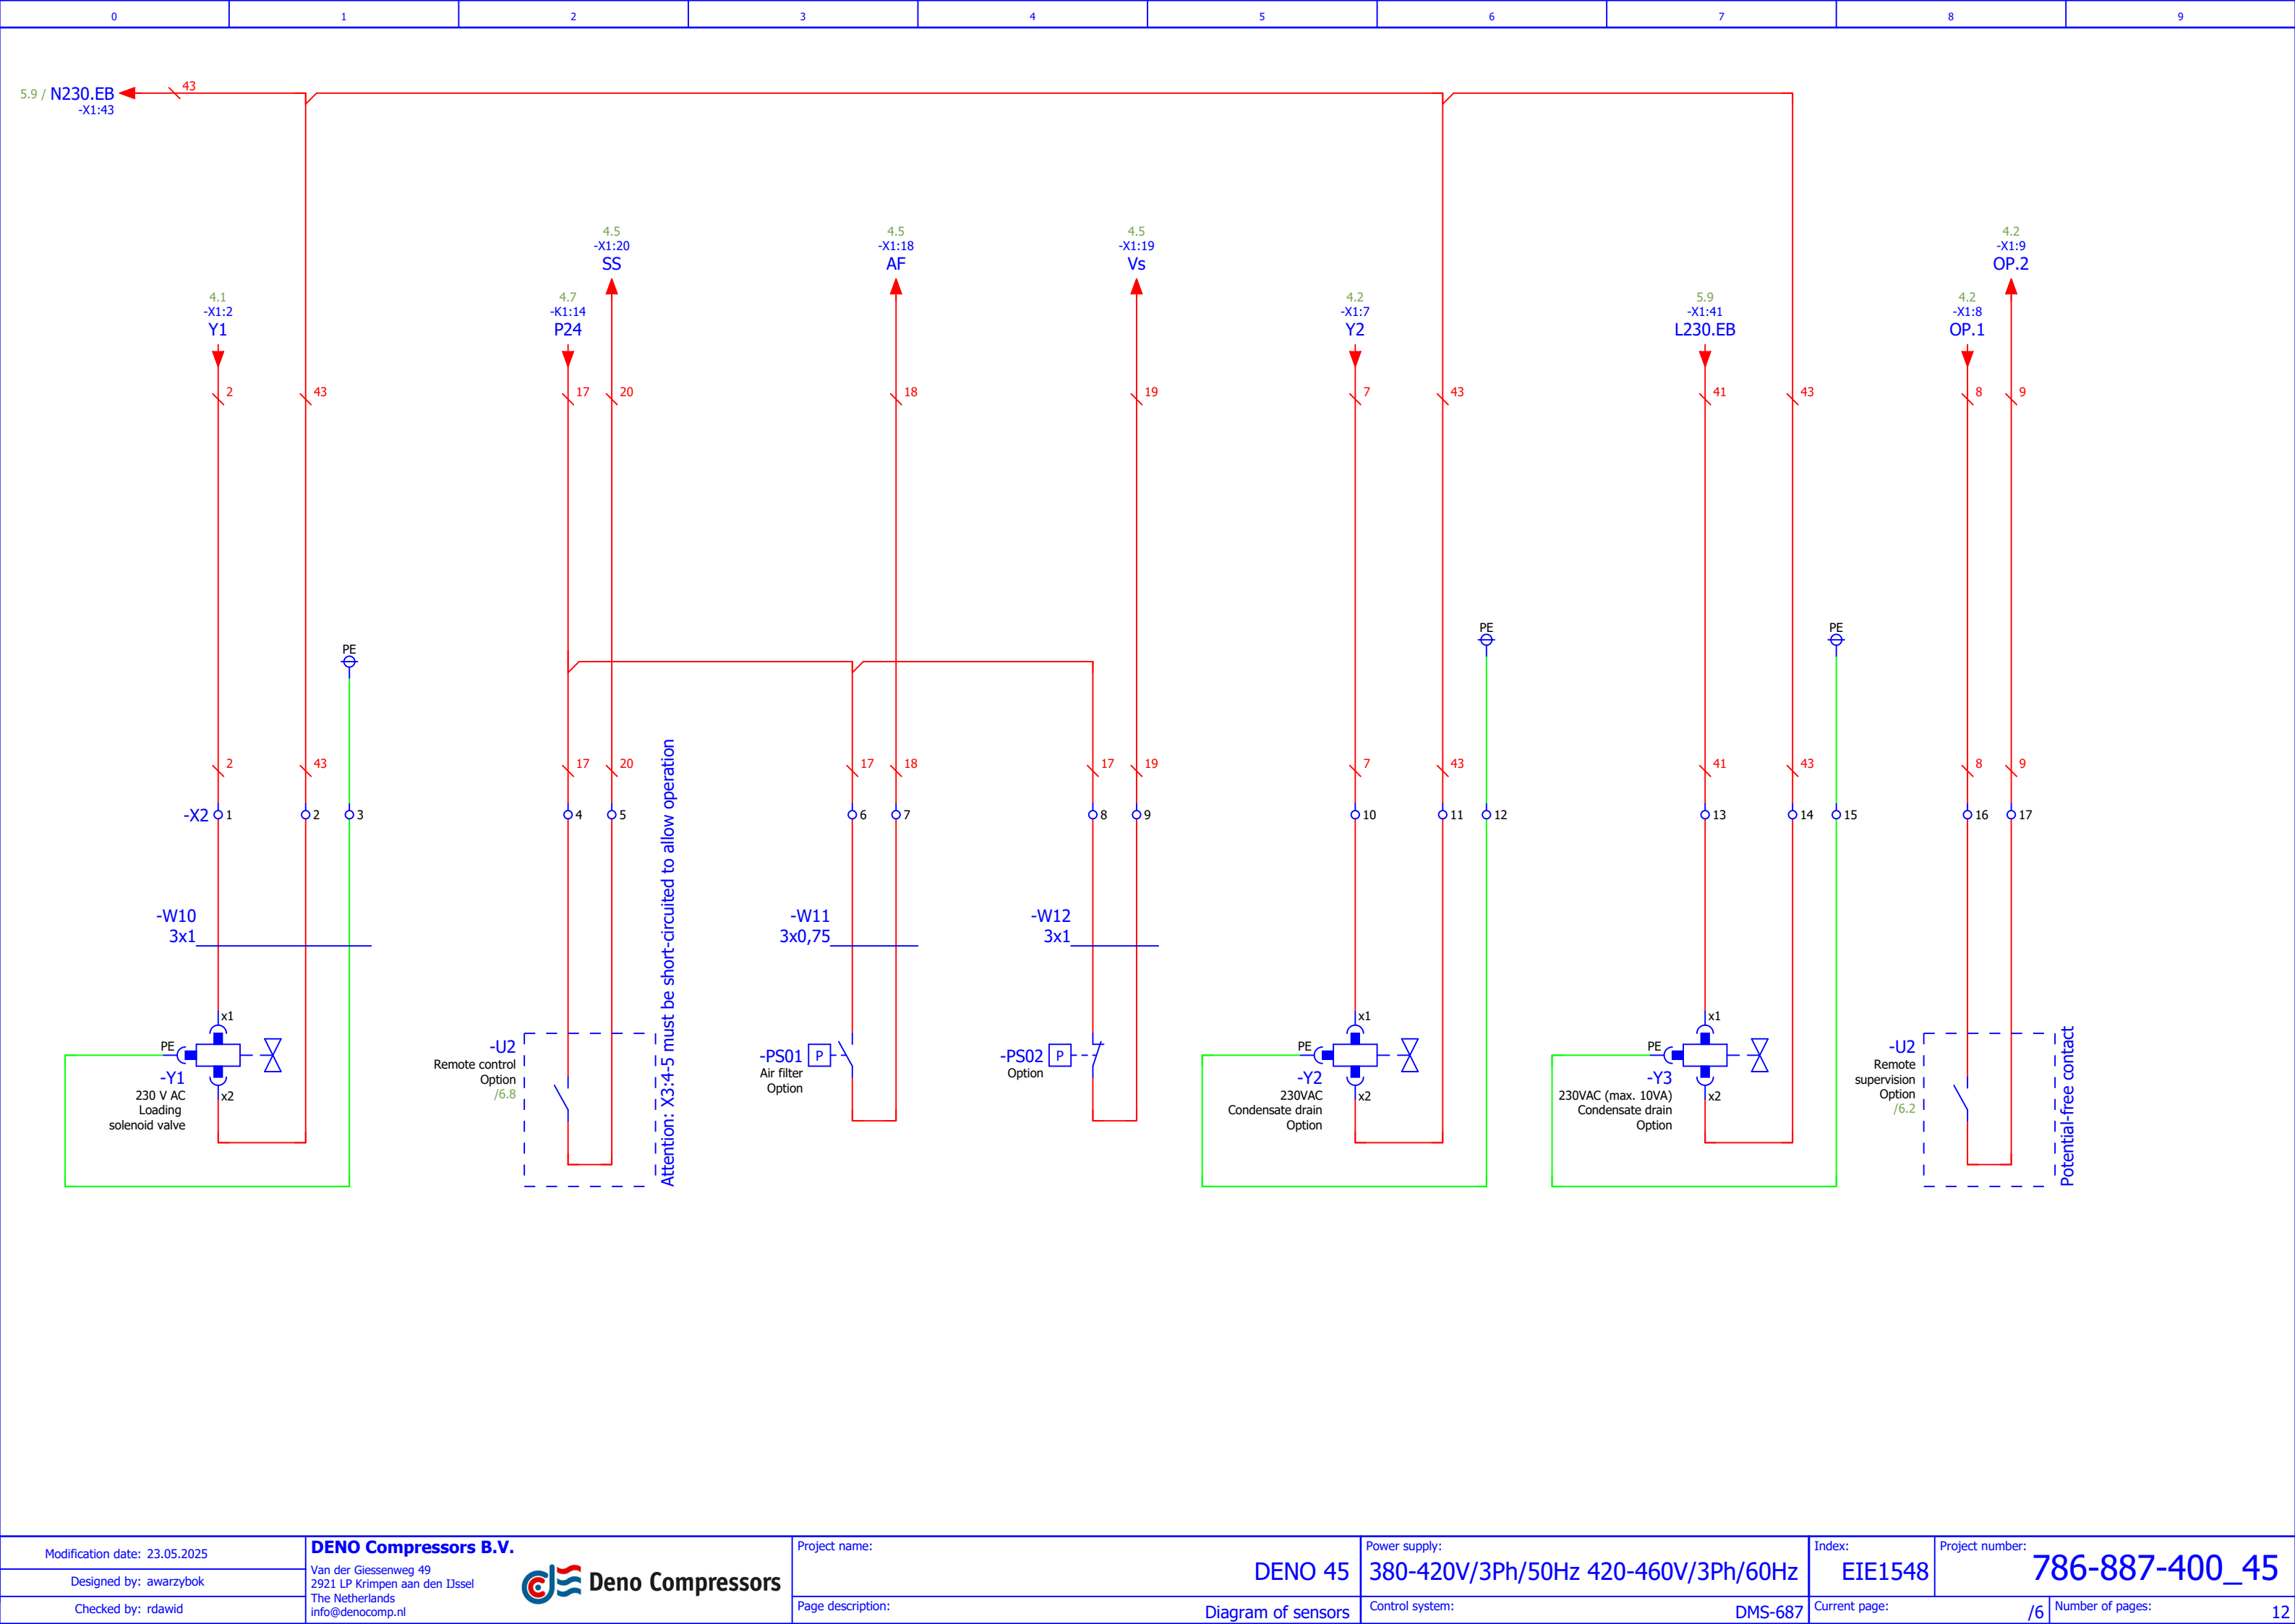

Configuration of inputs and outputs

Apparatus identifier		Function		Manufacturer		Type number		Index	
=+-A1		Microprocessor controller		Deno Compressors B.V.		DMS-687		ESM0199	
Connector number	Description of connector	Pin number	Pin name		Signal name		Logic / Range		
-X1	DIGITAL OUTPUTS	2	REL1		Y valve		NO		
-X1	DIGITAL OUTPUTS	3	REL2		Main power supply		NO		
-X1	DIGITAL OUTPUTS	4	REL3		Star		NO		
-X1	DIGITAL OUTPUTS	5	REL4		Delta		NO		
-X1	DIGITAL OUTPUTS	7	REL5		Condensate drain		NO		
-X2	DIGITAL OUTPUTS	2	REL6		Running		NO		
-X2	DIGITAL OUTPUTS	4	REL7		Compressing		NO		
-X2	DIGITAL OUTPUTS	6	REL8		Service		NO		
-X2	DIGITAL OUTPUTS	7	REL9NC		Error		NC		
-X2	DIGITAL OUTPUTS	9	REL9NO		=		NO		
-X3	DIGITAL INPUTS	2	DI1		Emergency stop		NC		
-X3	DIGITAL INPUTS	3	DI2		Air filter error		NO		
-X3	DIGITAL INPUTS	4	DI3		Suction sensor		NO		
-X3	DIGITAL INPUTS	5	DI4		Remote start-stop		NO		
-X3	DIGITAL INPUTS	6	DI5		Power supply asymmetry		NC		
-X3	DIGITAL INPUTS	7	DI6		Free				
-X3	DIGITAL INPUTS	8	DI7		=				
-X3	DIGITAL INPUTS	9	DI8		Remote load/unload		NO		
-X7	ANALOG INPUTS	2	AO1		Free				
-X7	ANALOG INPUTS	4	AO2		=				
-X8	ANALOG INPUTS	3	AI1		Network pressure		4÷20mA		
-X8	ANALOG INPUTS	5	AI2		Free				
-X8	ANALOG INPUTS	7	AI3		=				
-X8	ANALOG INPUTS	9	MC1		Current transformer		0÷5A		
-X9	TEMPERATURE INPUTS	1	RTD4		Free				
-X9	TEMPERATURE INPUTS	3	RTD3		=				
-X9	TEMPERATURE INPUTS	5	RTD2		Motor temperature		PTC		
-X9	TEMPERATURE INPUTS	7	RTD1		Oil temperature		Pt100		

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---


List of articles

[illegible]

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

List of cables

[illegible]

Modification date: 23.05.2025	DENO Compressors B.V.  Van der Giessenweg 49 2921 LP Krimpen aan den IJssel The Netherlands info@denocomp.nl	Project name:	DENO 45	Power supply:	380-420V/3Ph/50Hz 420-460V/3Ph/60Hz	Index:	EIE1548	Project number:	786-887-400_45
Designed by: awarzybok		Page description:	List of cables	Control system:	DMS-687	Current page:	/9	Number of pages:	12
Checked by: rdawid									

Plan of terminals

Sort of connector		Connector type		Terminal block						Position	
				Target ID		Connection	Terminal	Bridge	Target ID	Connection	
Rail terminal block		AVK 2,5					1		-A1	-X1:1	/4.0
Rail terminal block		AVK 2,5	-X2		1		2		-A1	-X1:2	/4.1
Rail terminal block		AVK 2,5	-KM1		A1		3		-A1	-X1:3	/4.1
Rail terminal block		AVK 2,5	-KM3		31		4		-A1	-X1:4	/4.1
Rail terminal block		AVK 2,5	-KM2		31		5		-A1	-X1:5	/4.1
Rail terminal block		AVK 2,5					6		-A1	-X1:6	/4.1
Rail terminal block		AVK 2,5	-X2		10		7		-A1	-X1:7	/4.2
Rail terminal block		AVK 2,5	-X2		16		8		-A1	-X2:1	/4.2
Rail terminal block		AVK 2,5	-X2		17		9		-A1	-X2:2	/4.2
Rail terminal block		AVK 2,5					10		-A1	-X2:3	/4.3
Rail terminal block		AVK 2,5					11		-A1	-X2:4	/4.3
Rail terminal block		AVK 2,5					12		-A1	-X2:5	/4.3
Rail terminal block		AVK 2,5					13		-A1	-X2:6	/4.3
Rail terminal block		AVK 2,5					14		-A1	-X2:7	/4.3
Rail terminal block		AVK 2,5					15		-A1	-X2:8	/4.4
Rail terminal block		AVK 2,5					16		-A1	-X2:9	/4.4
Rail terminal block		AVK 2,5	-K1		14		17		-A1	-X3:1	/4.4
									-S1	1	
Rail terminal block		AVK 2,5	-X2		7		18		-A1	-X3:3	/4.5
Rail terminal block		AVK 2,5	-X2		9		19		-A1	-X3:4	/4.5
Rail terminal block		AVK 2,5	-X2		5		20		-A1	-X3:5	/4.5
Rail terminal block		AVK 2,5	-K1		11		21		-A1	-X3:6	/4.5
Rail terminal block		AVK 2,5					22		-A1	-X3:7	/4.5
Rail terminal block		AVK 2,5					23		-A1	-X3:8	/4.6
Rail terminal block		AVK 2,5					24		-A1	-X3:9	/4.6
PE rail terminal block		AVK 2,5/4 TK	-PE				25		-A1	-X5:1	/5.0
Rail terminal block		AVK 2,5	-F5				26		-A1	-X5:2	/5.1
Rail terminal block		AVK 2,5	-F4				27		-A1	-X5:3	/5.1
Rail terminal block		AVK 2,5	-PT01		+		28		-A1	-X8:2	/5.4
Rail terminal block		AVK 2,5	-PT01		s		29		-A1	-X8:3	/5.4
Rail terminal block		AVK 2,5					30		-A1	-X8:4	/5.4
Rail terminal block		AVK 2,5					31		-A1	-X8:5	/5.4
Rail terminal block		AVK 2,5	-T2				32		-A1	-X8:8	/5.5
Rail terminal block		AVK 2,5	-T2				33		-A1	-X8:9	/5.5
Rail terminal block		AVK 2,5					34		-A1	-X9:3	/5.6

Plan of terminals

[illegible]

Plan of terminals

[illegible]