



Deno Compressors

DENO Compressors B.V.

Van der Giessenweg 49  
2921 LP Krimpen aan den IJssel  
The Netherlands  
info@denocomp.nl

Operation and Maintenance Manual - Electrical part

Project name: DENO 37  
Project number: 786-887-400\_37  
Index: EIE1547  
Power supply: 380-420V/3Ph/50Hz 420-460V/3Ph/60Hz  
Power supply type: L1, L2, L3, PE  
Control: 24VAC  
Control system: DMS-687


Last change: 23.05.2025  
Number of pages: 12  
Notes:


# Contents


[illegible]



- The direction of rotation is determined by looking at the motor from the drive side.
- Connection type suitable for counterclockwise direction of rotation.
- The method of connection depends on the design of the screw stage.

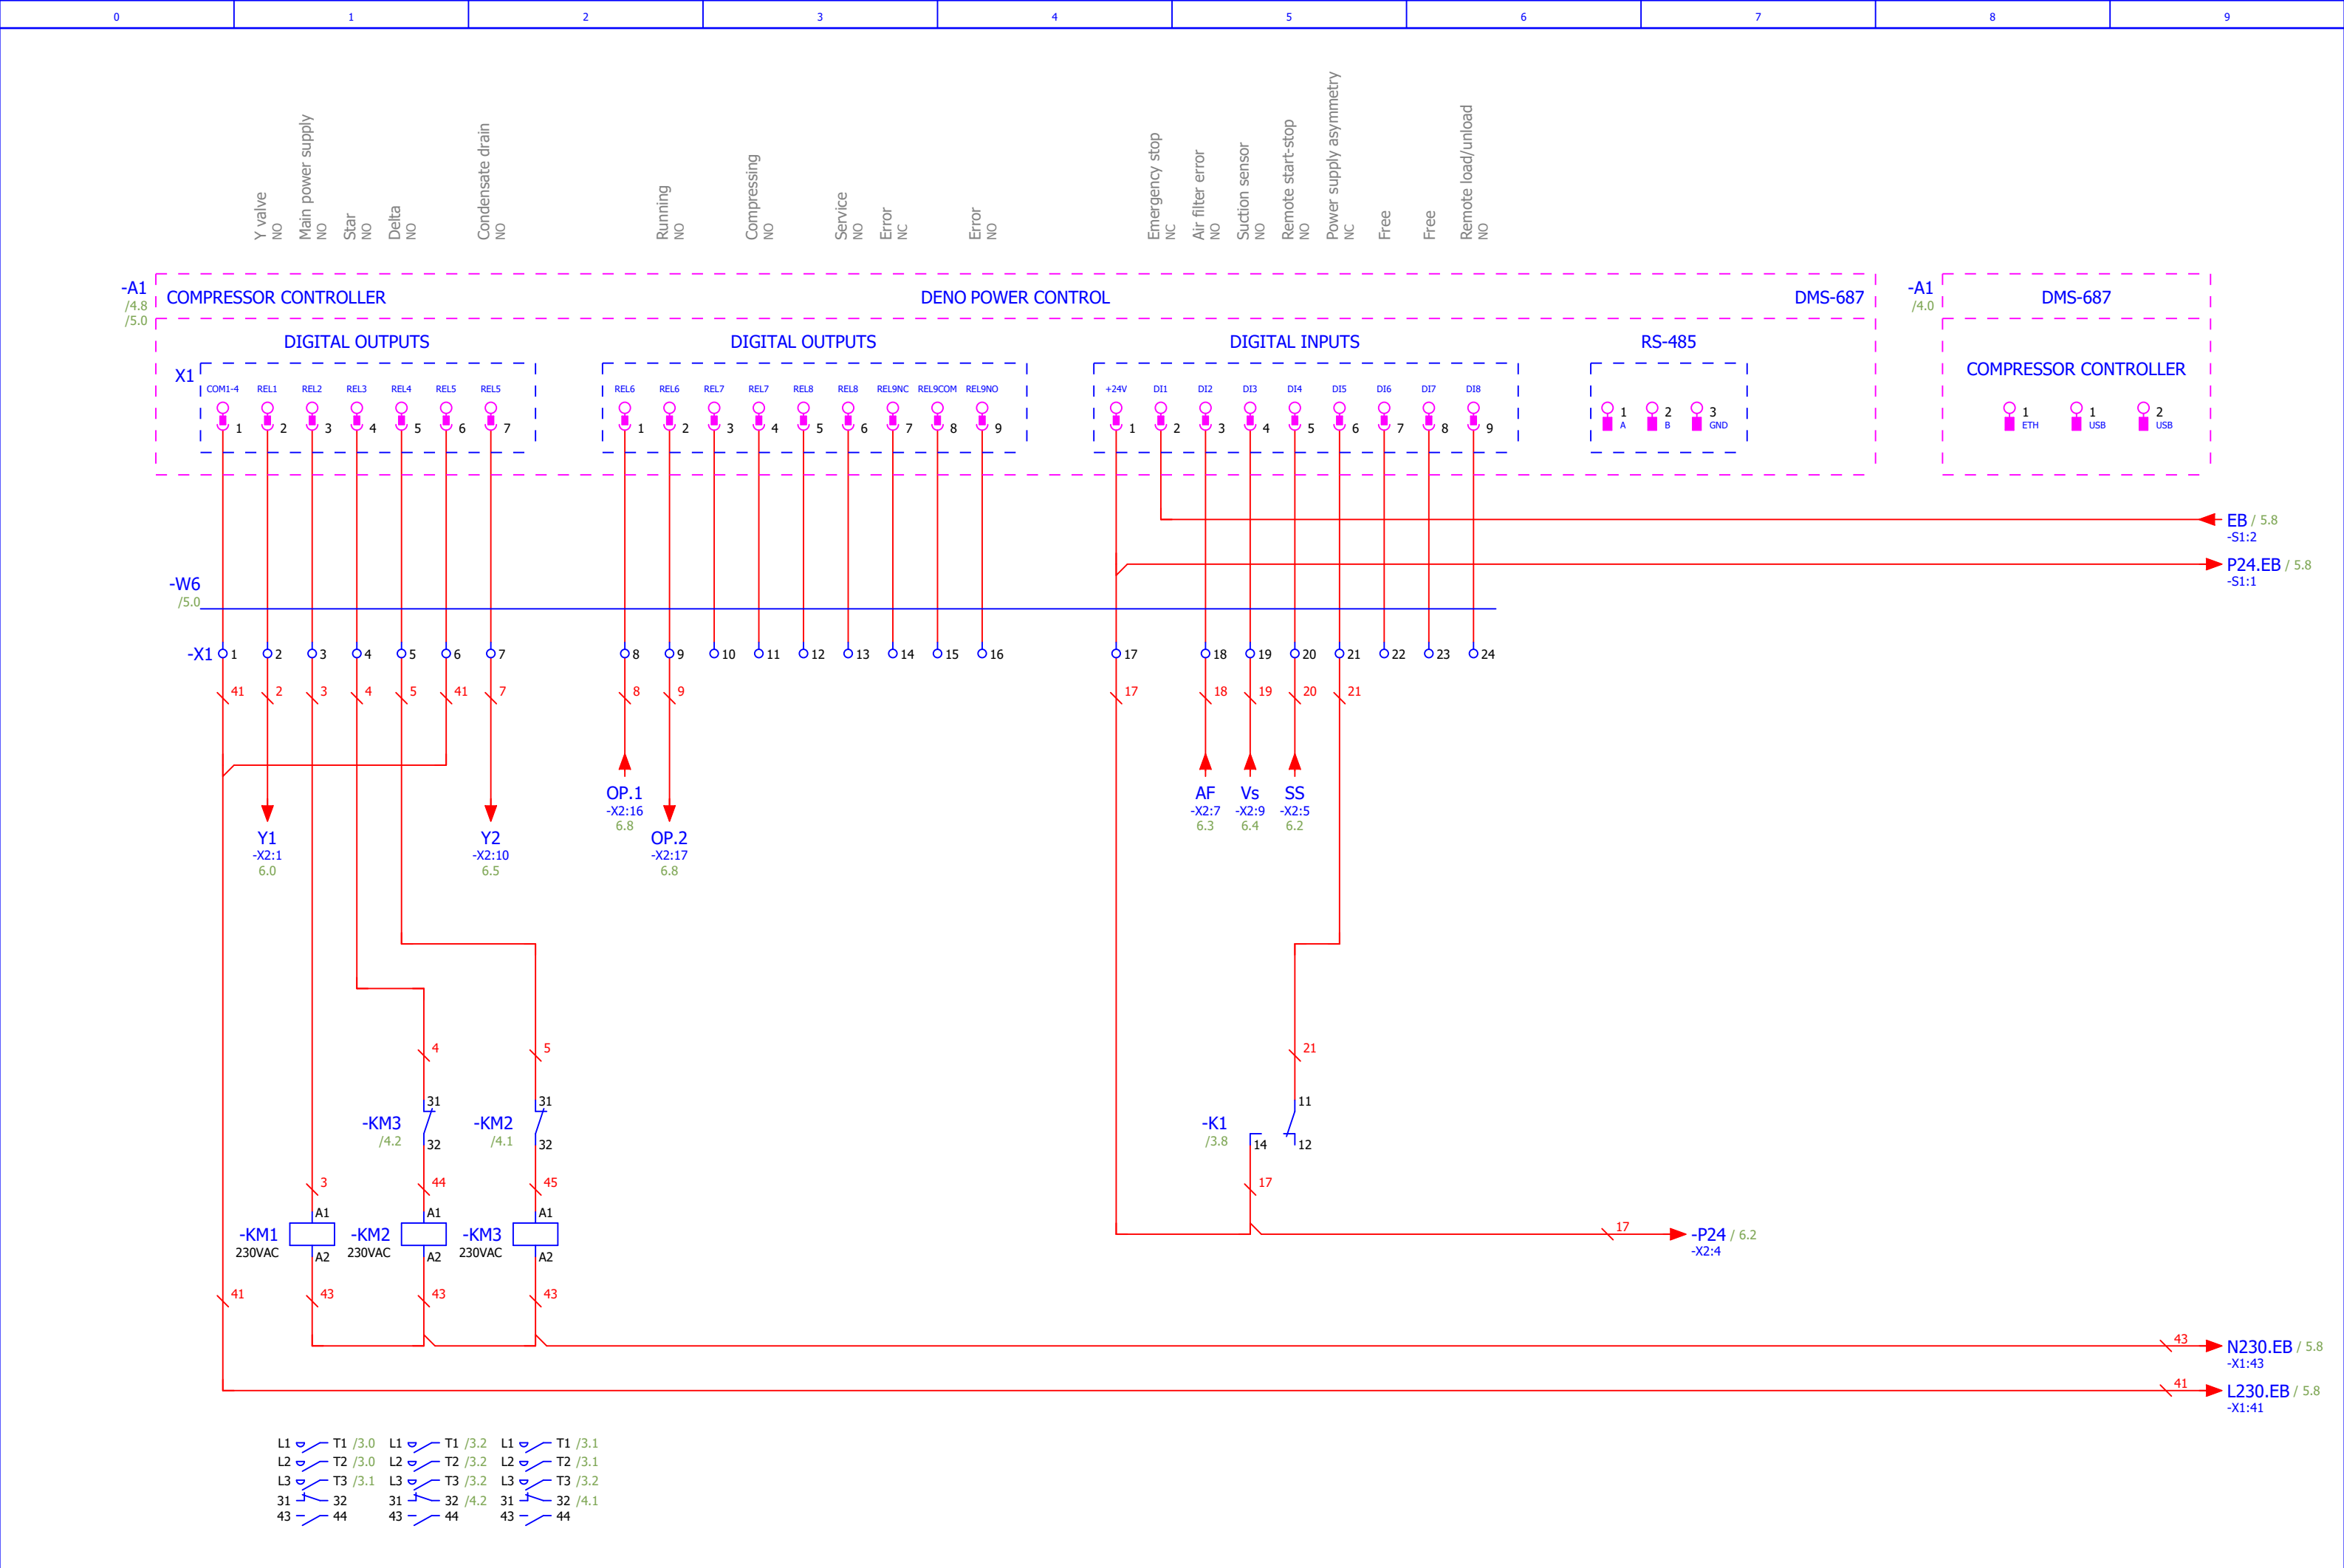

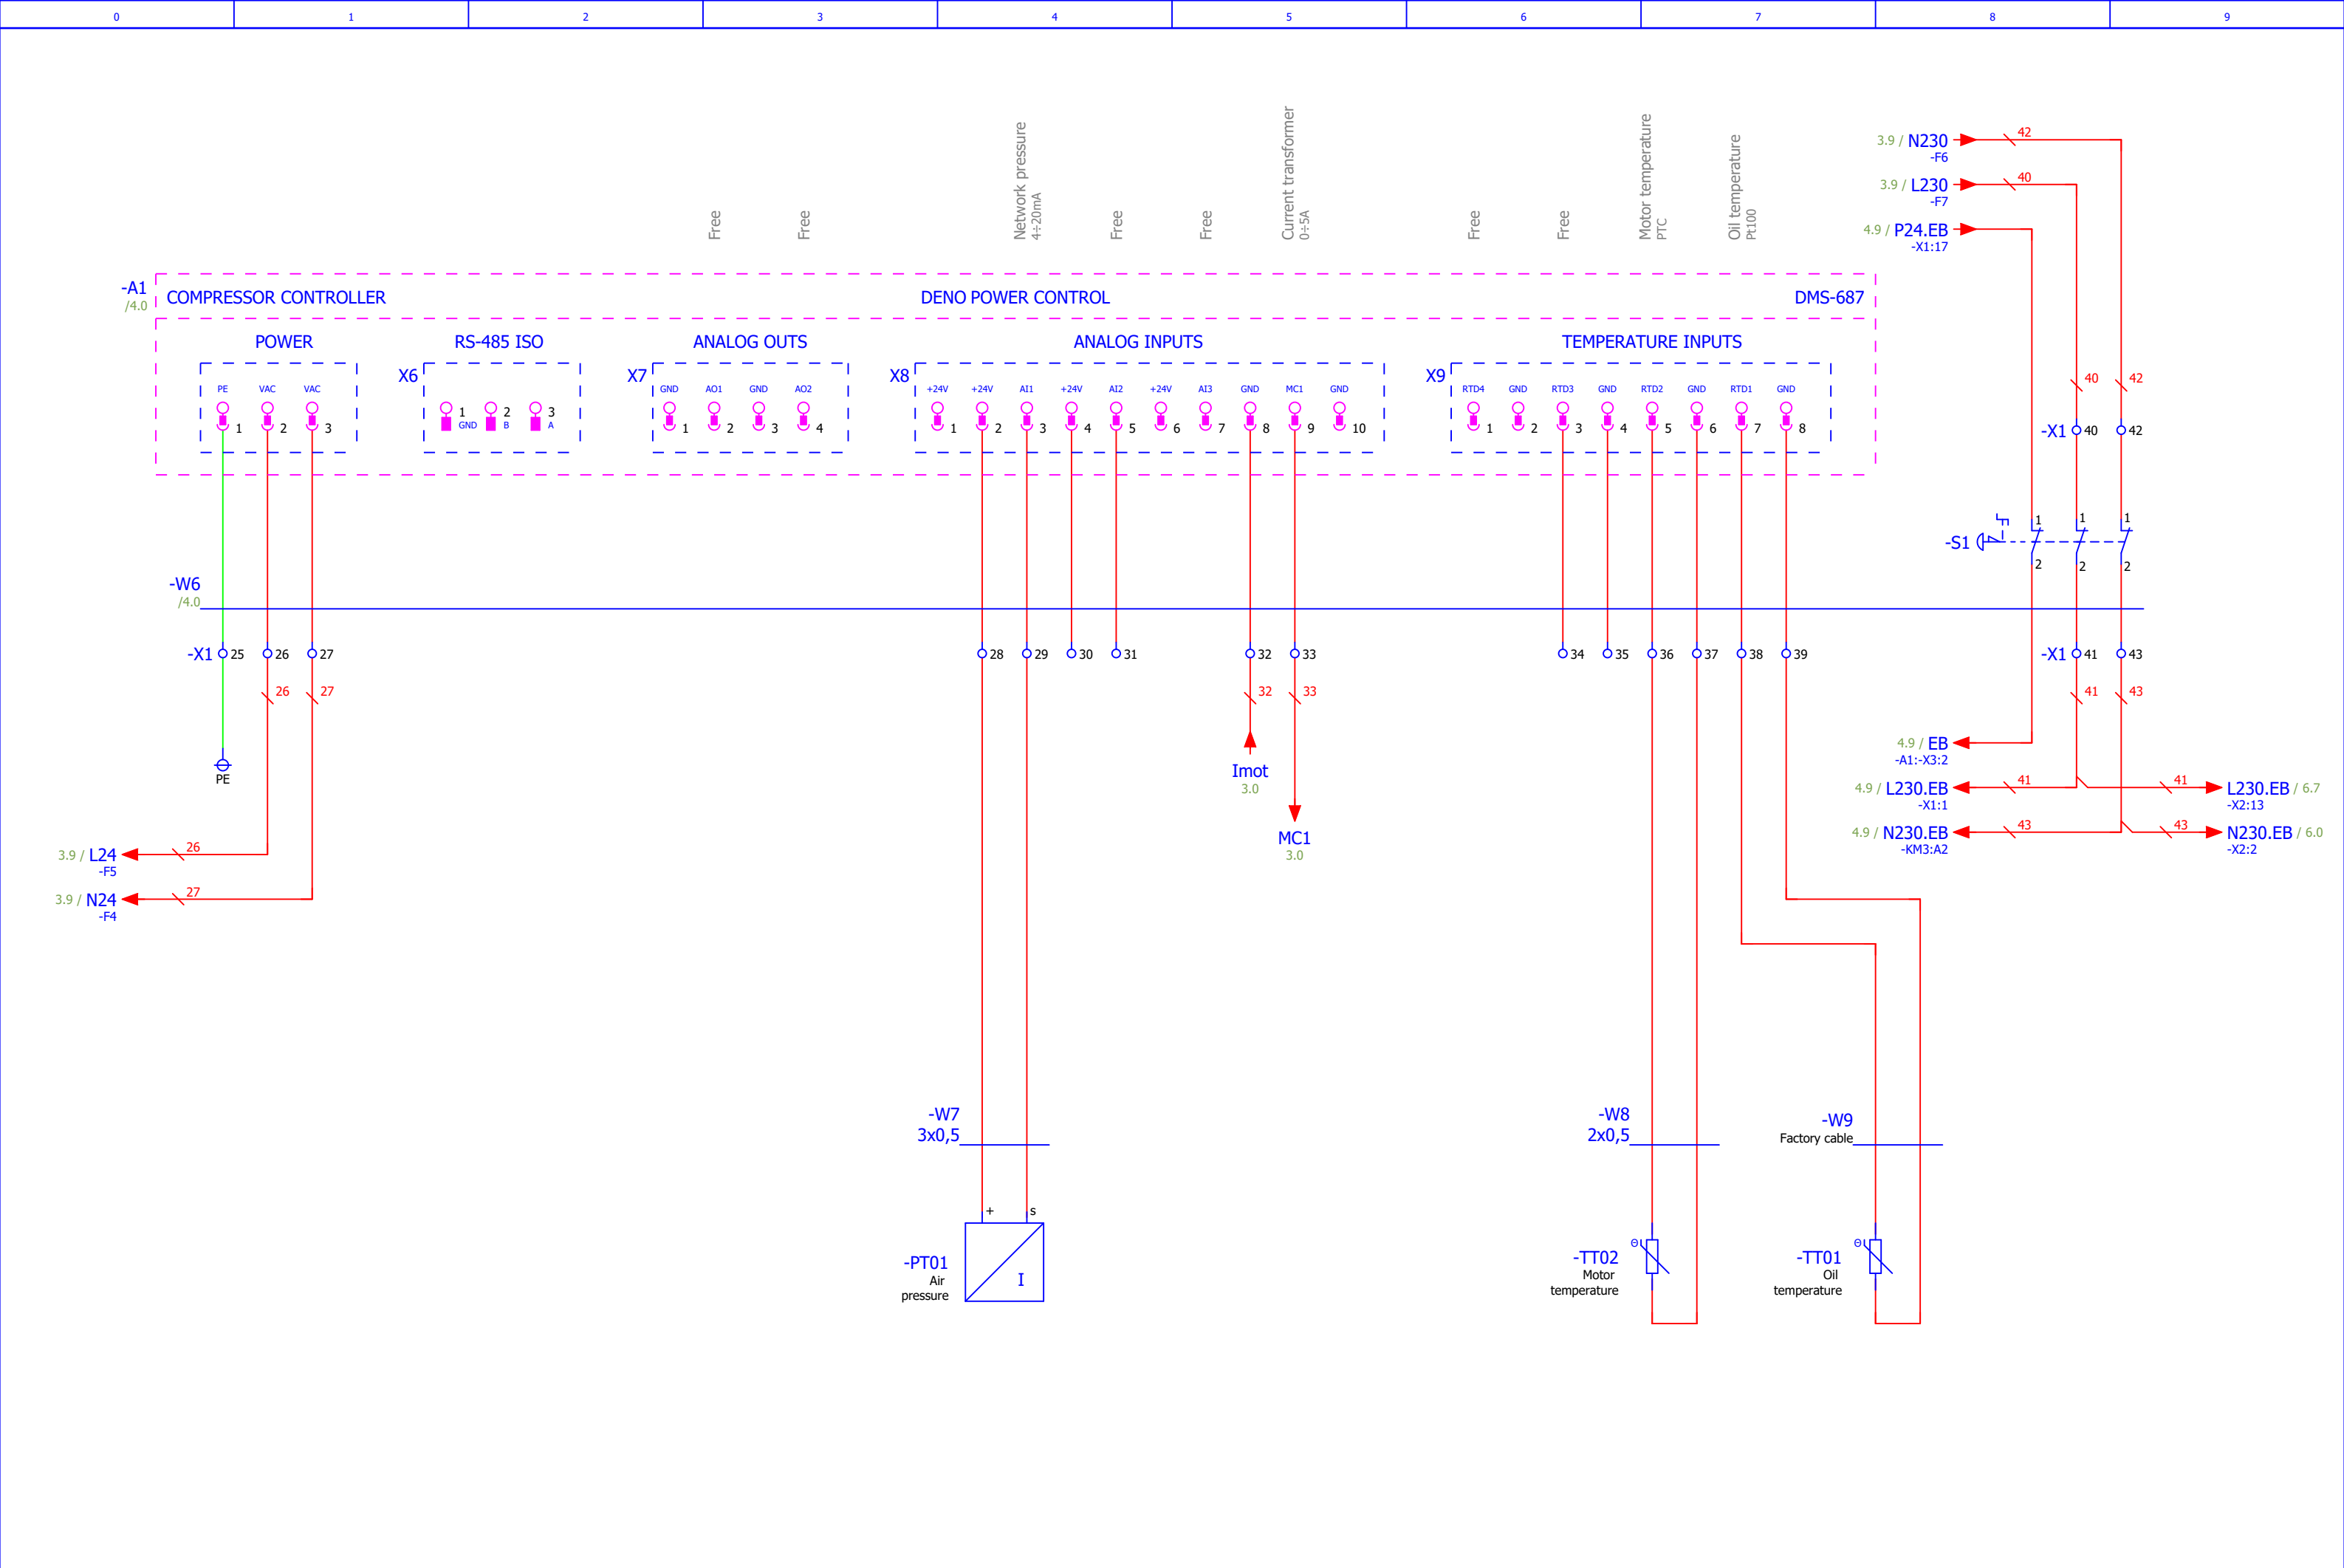

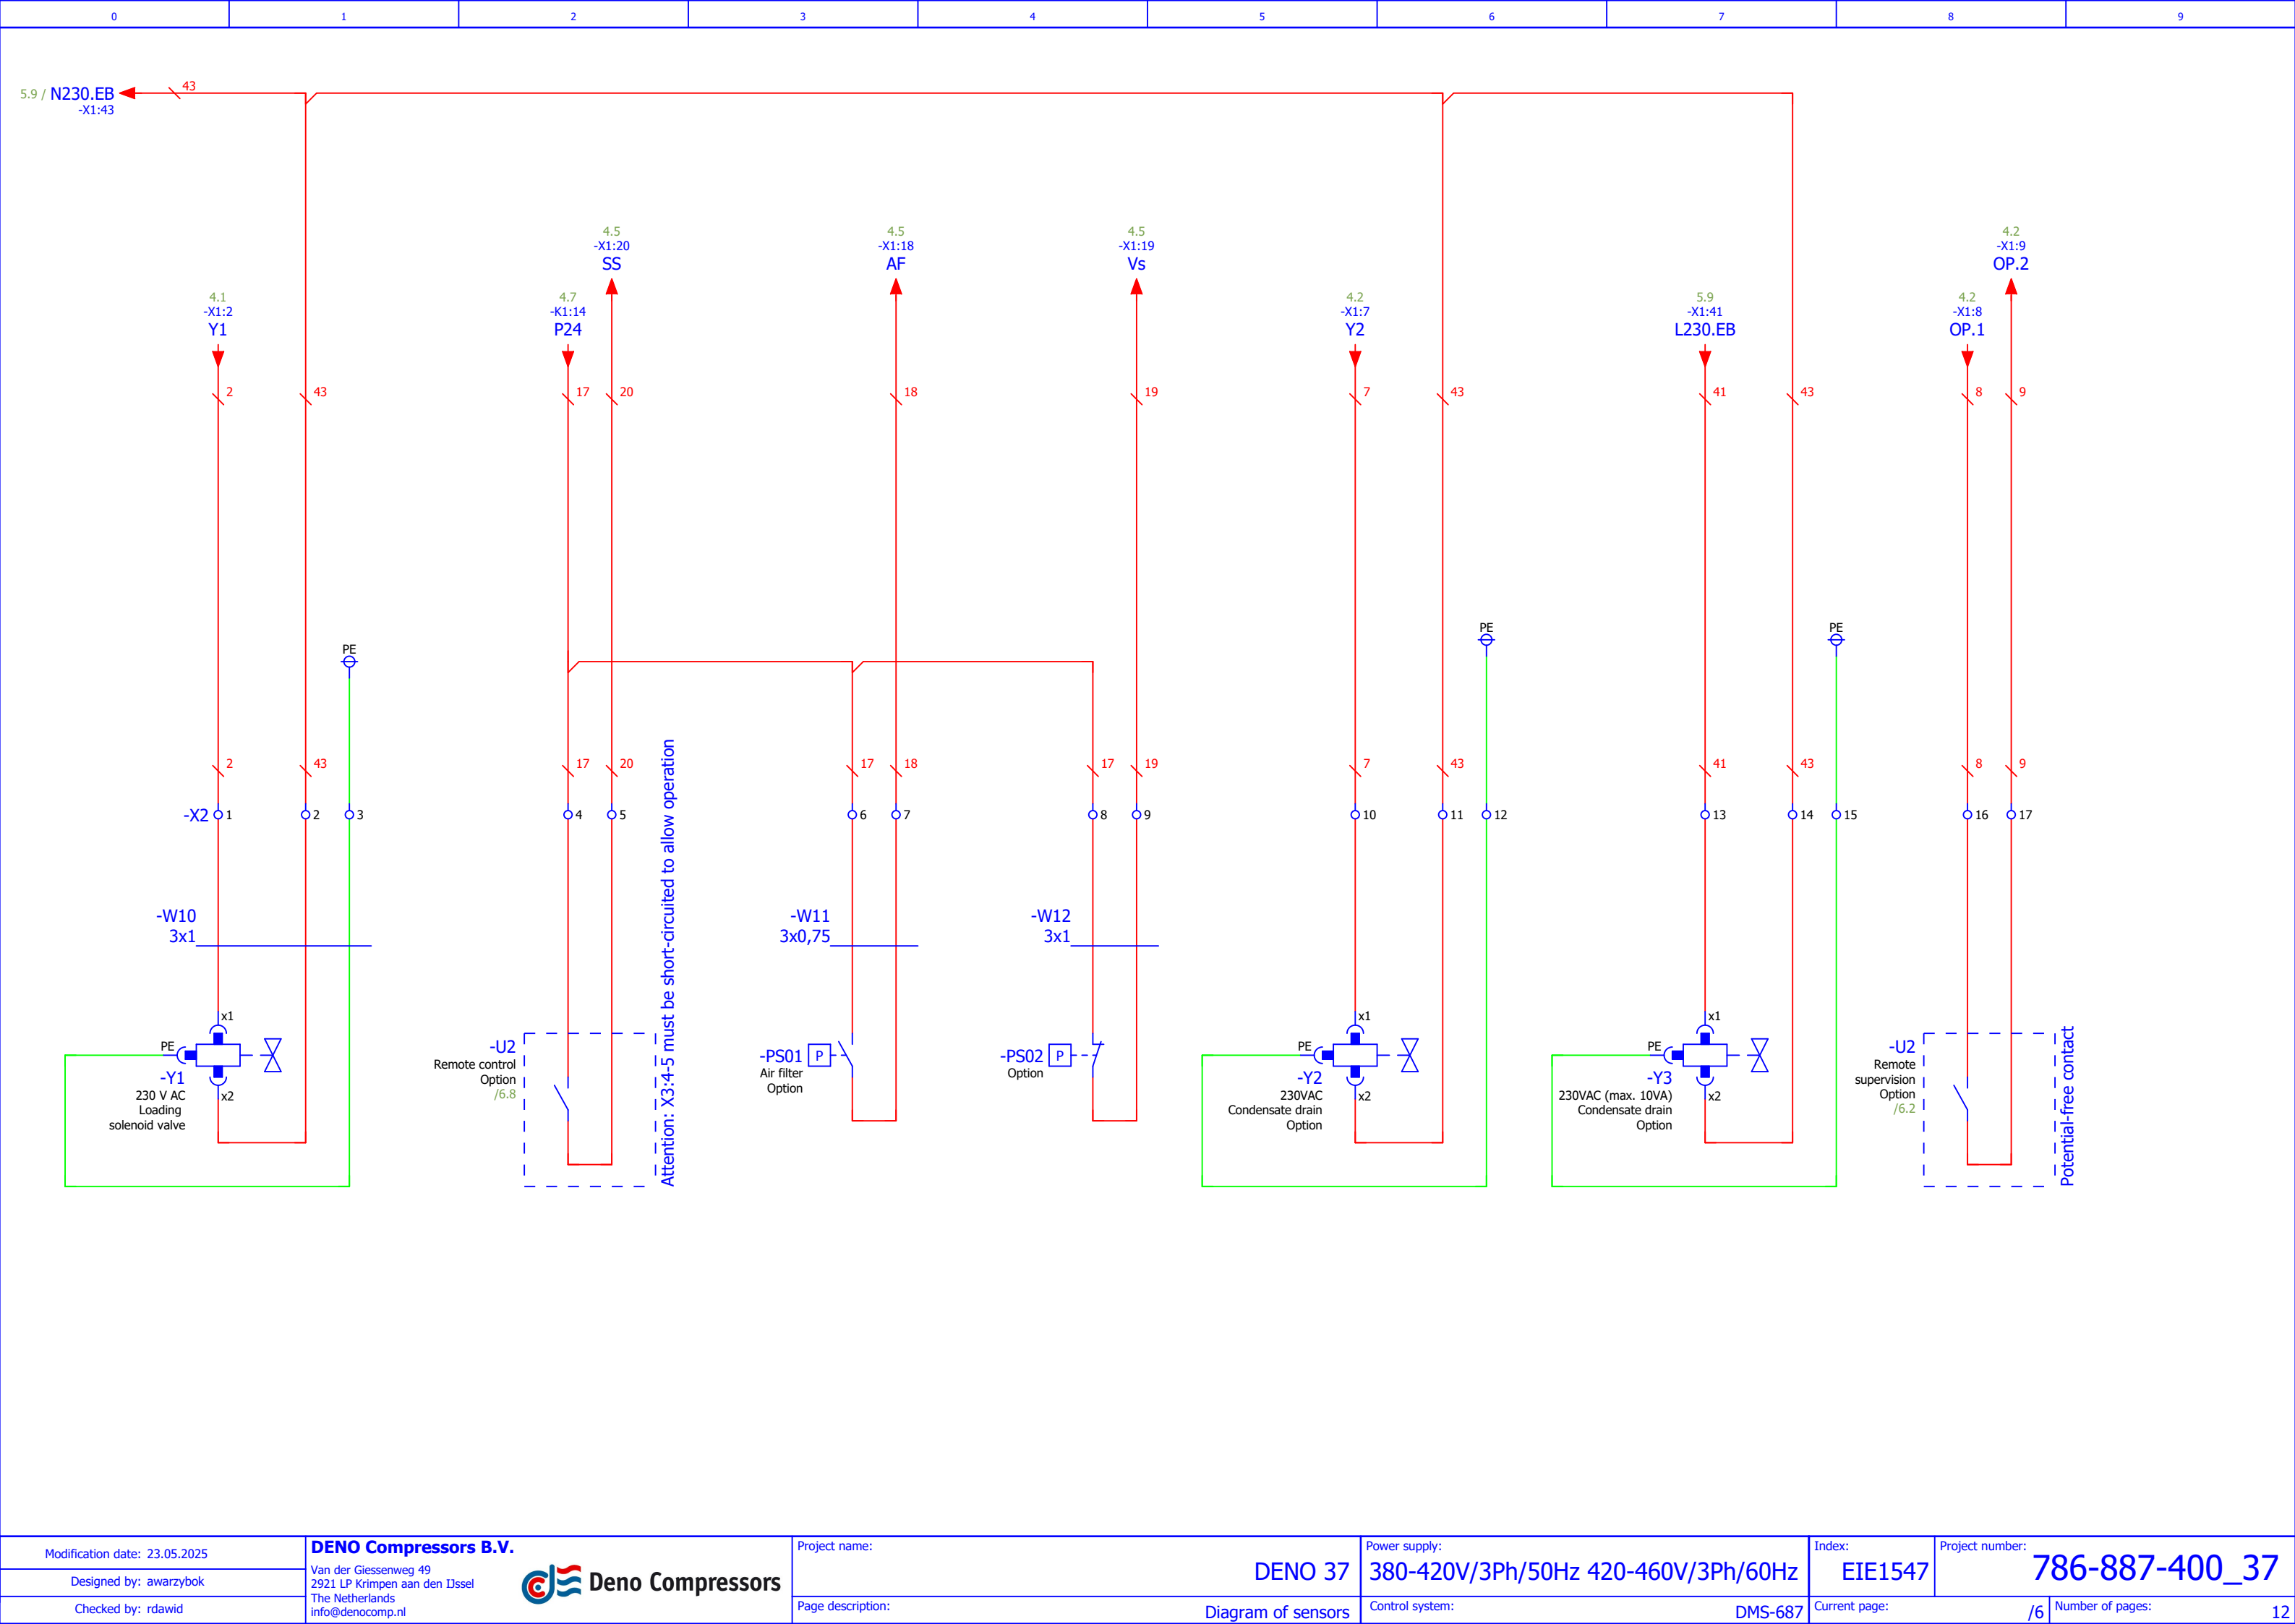

# Configuration of inputs and outputs

Apparatus identifier		Function	Manufacturer	Type number	Index
=+-A1		Microprocessor controller	Deno Compressors B.V.	DMS-687	ESM0199
Connector number	Description of connector	Pin number	Pin name	Signal name	Logic / Range
-X1	DIGITAL OUTPUTS	2	REL1	Y valve	NO
-X1	DIGITAL OUTPUTS	3	REL2	Main power supply	NO
-X1	DIGITAL OUTPUTS	4	REL3	Star	NO
-X1	DIGITAL OUTPUTS	5	REL4	Delta	NO
-X1	DIGITAL OUTPUTS	7	REL5	Condensate drain	NO
-X2	DIGITAL OUTPUTS	2	REL6	Running	NO
-X2	DIGITAL OUTPUTS	4	REL7	Compressing	NO
-X2	DIGITAL OUTPUTS	6	REL8	Service	NO
-X2	DIGITAL OUTPUTS	7	REL9NC	Error	NC
-X2	DIGITAL OUTPUTS	9	REL9NO	=	NO
-X3	DIGITAL INPUTS	2	DI1	Emergency stop	NC
-X3	DIGITAL INPUTS	3	DI2	Air filter error	NO
-X3	DIGITAL INPUTS	4	DI3	Suction sensor	NO
-X3	DIGITAL INPUTS	5	DI4	Remote start-stop	NO
-X3	DIGITAL INPUTS	6	DI5	Power supply asymmetry	NC
-X3	DIGITAL INPUTS	7	DI6	Free	
-X3	DIGITAL INPUTS	8	DI7	=	
-X3	DIGITAL INPUTS	9	DI8	Remote load/unload	NO
-X7	ANALOG INPUTS	2	AO1	Free	
-X7	ANALOG INPUTS	4	AO2	=	
-X8	ANALOG INPUTS	3	AI1	Network pressure	4÷20mA
-X8	ANALOG INPUTS	5	AI2	Free	
-X8	ANALOG INPUTS	7	AI3	=	
-X8	ANALOG INPUTS	9	MC1	Current transformer	0÷5A
-X9	TEMPERATURE INPUTS	1	RTD4	Free	
-X9	TEMPERATURE INPUTS	3	RTD3	=	
-X9	TEMPERATURE INPUTS	5	RTD2	Motor temperature	PTC
-X9	TEMPERATURE INPUTS	7	RTD1	Oil temperature	Pt100

[illegible]




0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

## List of cables

[illegible]

Plan of terminals

		Terminal block						
		X1						
		Target ID	Connection	Terminal	Bridge	Target ID	Connection	
Position								
Sort of connector	Connector type							
Rail terminal block	AVK 2,5			1		-A1	-X1:1	/4.0
Rail terminal block	AVK 2,5	-X2	1	2		-A1	-X1:2	/4.1
Rail terminal block	AVK 2,5	-KM1	A1	3		-A1	-X1:3	/4.1
Rail terminal block	AVK 2,5	-KM3	31	4		-A1	-X1:4	/4.1
Rail terminal block	AVK 2,5	-KM2	31	5		-A1	-X1:5	/4.1
Rail terminal block	AVK 2,5			6		-A1	-X1:6	/4.1
Rail terminal block	AVK 2,5	-X2	10	7		-A1	-X1:7	/4.2
Rail terminal block	AVK 2,5	-X2	16	8		-A1	-X2:1	/4.2
Rail terminal block	AVK 2,5	-X2	17	9		-A1	-X2:2	/4.2
Rail terminal block	AVK 2,5			10		-A1	-X2:3	/4.3
Rail terminal block	AVK 2,5			11	-A1	-X2:4	/4.3	
Rail terminal block	AVK 2,5			12	-A1	-X2:5	/4.3	
Rail terminal block	AVK 2,5			13	-A1	-X2:6	/4.3	
Rail terminal block	AVK 2,5			14	-A1	-X2:7	/4.3	
Rail terminal block	AVK 2,5			15	-A1	-X2:8	/4.4	
Rail terminal block	AVK 2,5			16	-A1	-X2:9	/4.4	
Rail terminal block	AVK 2,5	-K1	14	17	-A1	-X3:1	/4.4	
					-S1	1		
Rail terminal block	AVK 2,5	-X2	7	18	-A1	-X3:3	/4.5	
Rail terminal block	AVK 2,5	-X2	9	19	-A1	-X3:4	/4.5	
Rail terminal block	AVK 2,5	-X2	5	20	-A1	-X3:5	/4.5	
Rail terminal block	AVK 2,5	-K1	11	21	-A1	-X3:6	/4.5	
Rail terminal block	AVK 2,5			22	-A1	-X3:7	/4.5	
Rail terminal block	AVK 2,5			23	-A1	-X3:8	/4.6	
Rail terminal block	AVK 2,5			24	-A1	-X3:9	/4.6	
PE rail terminal block	AVK 2,5/4 TK	-PE		25	-A1	-X5:1	/5.0	
Rail terminal block	AVK 2,5	-F5		26	-A1	-X5:2	/5.1	
Rail terminal block	AVK 2,5	-F4		27	-A1	-X5:3	/5.1	
Rail terminal block	AVK 2,5	-PT01	+	28	-A1	-X8:2	/5.4	
Rail terminal block	AVK 2,5	-PT01	s	29	-A1	-X8:3	/5.4	
Rail terminal block	AVK 2,5			30	-A1	-X8:4	/5.4	
Rail terminal block	AVK 2,5			31	-A1	-X8:5	/5.4	
Rail terminal block	AVK 2,5	-T2		32	-A1	-X8:8	/5.5	
Rail terminal block	AVK 2,5	-T2		33	-A1	-X8:9	/5.5	
Rail terminal block	AVK 2,5			34	-A1	-X9:3	/5.6	

## Plan of terminals

[illegible]

## Plan of terminals

[illegible]